


ACRY

Technical description


- > White, grey, black color antimicrobial powder coated steel sheet body part
 - > Opal plexi-glass (PMMA) diffuser
 - > Option: Switchable or dimmable (1-10V, DALI, Touch-Dim, Casambi)
 - > SDCM ≤ 3 (3-step Mac Adam)
 - > LM80 - 50.000 hours LED life
 - > Surface mounted
 - > 220-240V AC
 - > -20°C ... +35°C

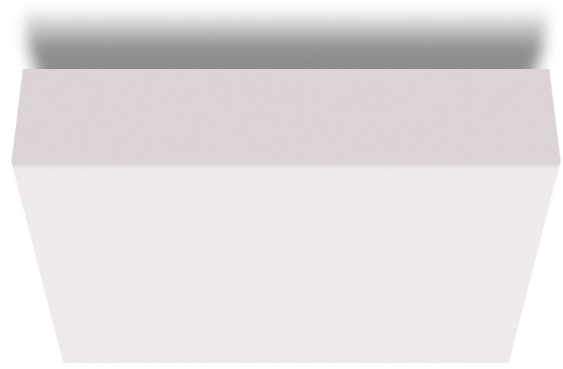

TECHNICAL DATA

Code	W	Luminous Flux (lm)	Efficiency (lm/W)	CRI	Color Temperature	Dimensions WxLxH (mm)
3030ACY.24.02	24W	2520 lm	>105 lm/W	>80	3000K - 6500K	300x300x90mm
4040ACY.30.02	30W	3150 lm	>105 lm/W	>80	3000K - 6500K	400x400x90mm
5555ACY.37.02	37W	3885 lm	>105 lm/W	>80	3000K - 6500K	550x550x90mm
6060ACY.37.02	37W	3885 lm	>105 lm/W	>80	3000K - 6500K	600x600x90mm

TECHNICAL DRAWING

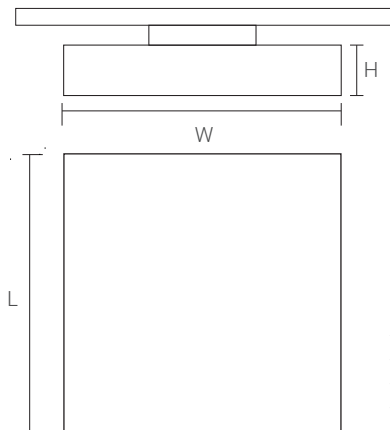

Dimensions (WxLxH)
300x300x90mm
400x400x90mm
550x550x90mm
600x600x90mm

LIGHT BEAM

