


BLAZE L

Technical description


- > Aluminium housing
- > White, grey, black antimicrobial electrostatic powder coated
- > Impact resistant IK08
- > Various beam angle options
- > Option: Switchable or dimmable
- > 1-10V, DALI, Touch-Dim, Casambi
- > 220-240V AC
- > -20 °C ... +55 °C
- > Recommended mounting height: 4-6m

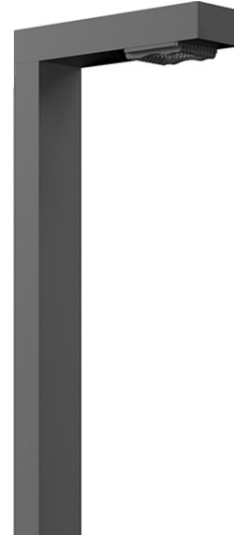

TECHNICAL DATA

Code	W	Luminous Flux (lm)	Efficiency (lm/W)	CRI	Color Temperature	Dimensions (mm)
30BLL.30.03	30W	3600lm	>120 lm/W	>80	3000K-6000K	80x150xH:3000
30BLL.60.03	60W	7200lm	>120 lm/W	>80	3000K-6000K	80x150xH:3000
40BLL.80.03	80W	9600lm	>120 lm/W	>80	3000K-6000K	80x150xH:4000
60BLL.100.03	100W	10400lm	>104 lm/W	>80	3000K-6000K	80x150xH:6000

TECHNICAL DRAWING

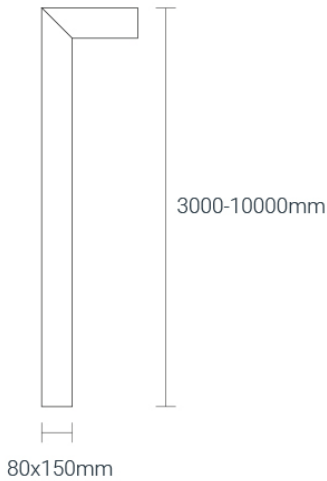

LIGHT BEAM

