


## PANEL LIGHTS

# STELO

### Technical description


- > White, grey, black color antimicrobial powder coated steel sheet housing
  - > Opal diffuser
- > Option: Switchable or dimmable (1-10V, DALI, Touch-Dim, Casambi)
  - > SDCM  $\leq$  3 (3-step Mac Adam)
  - > 220-240V AC
  - > -20°C ... +35°C

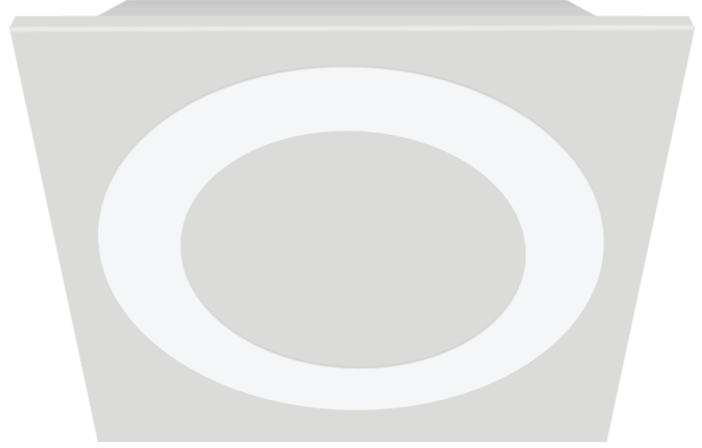

### TECHNICAL DATA

Code	W	Luminous Flux (lm)	Efficiency (lm/W)	CRI	Color Temperature	Dimensions L1xL2xH (mm)
6060ST.22.01	22W	1985 lm	>90 lm/W	>80	3000K - 6500K	595x595x65mm
6060ST.38.01	38W	3422 lm	>90 lm/W	>80	3000K - 6500K	595x595x65mm
6060ST.45.01	45W	4054 lm	>90 lm/W	>80	3000K - 6500K	595x595x65mm

### TECHNICAL DRAWING

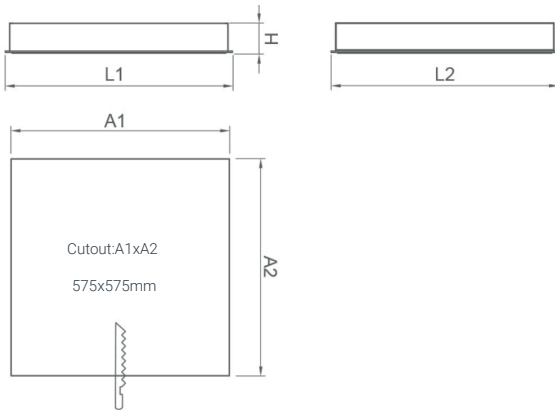

### LIGHT BEAM

