

## PANEL LIGHTS

# TWIN

### Technical description


- > White, grey, black color electrostatic powder coated steel sheet housing
- > PC louver reflector
- > Option: Switchable or dimmable (1-10V, DALI, Touch-Dim, Casambi)
- > SDCM  $\leq 3$  (3-step Mac Adam)
- > 220-240V AC
- >  $-20^{\circ}\text{C} \dots +35^{\circ}\text{C}$



### TECHNICAL DATA

Code	W	Luminous Flux (lm)	Efficiency (lm/W)	CRI	Color Temperature	Dimensions WxLxH (mm)
6060TW.18.01	18W	1925 lm	>110 lm/W	>80	3000K - 6500K	595x595x25mm
6060TW.36.01	36W	3961 lm	>110 lm/W	>80	3000K - 6500K	595x595x25mm
6060TW.54.01	54W	5945 lm	>110 lm/W	>80	3000K - 6500K	595x595x25mm

### TECHNICAL DATA

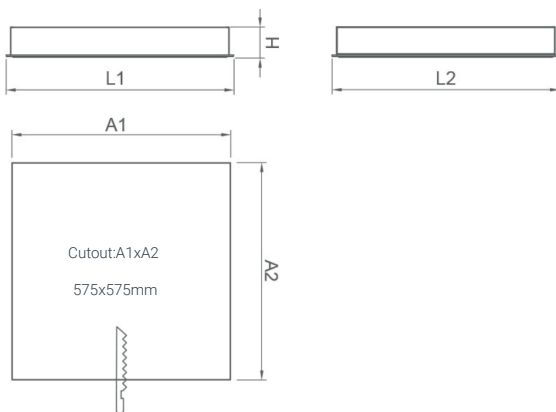

### LIGHT BEAM

