


HOLT SUSPENDED

Technical description


- White, grey, black color electrostatic powder coated aluminium extrusion housing
- SMD LED light source
- Lighting grade PC opal diffuser
- Microprismatic diffuser option for extra glare control
- Option: Switchable or dimmable
- Option: 1-10V, DALI, Touch-Dim, Casambi
- Option: 3 Hours emergency kit
- L80B10 - 60.000 hours
- SDCM ≤ 3 (3-step Mac Adam)
- 220-240V AC
- -20°C ... +35°C

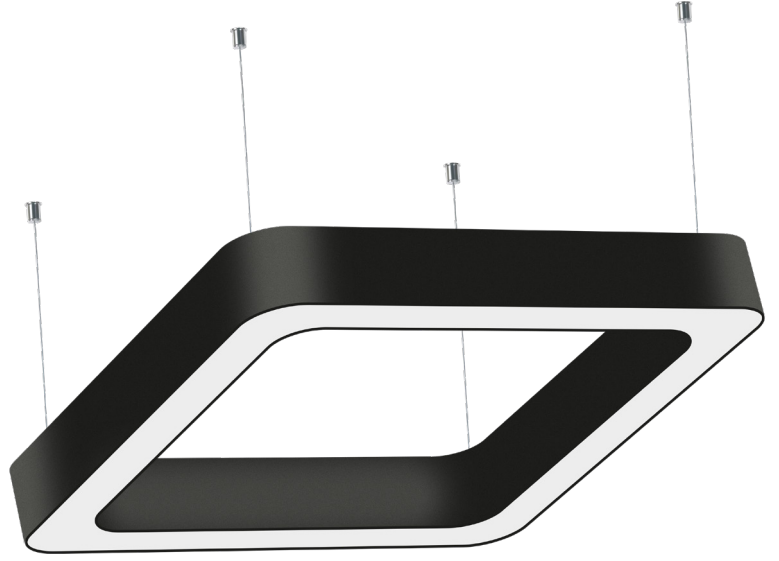

TECHNICAL DATA

Code	W	Luminous Flux (lm)	Efficiency (lm/W)	CRI	Color Temperature	Dimensions WxLxH (mm)
3030HLP.24.02	24W	2640 lm	>110 lm/W	>80	3000K - 6500K	300x300x80mm
4040HLP.35.02	35W	3850 lm	>110 lm/W	>80	3000K - 6500K	400x400x80mm
6060HLP.52.02	52W	5720 lm	>110 lm/W	>80	3000K - 6500K	600x600x80mm
9090HLP.78.02	78W	8580 lm	>110 lm/W	>80	3000K - 6500K	900x900x80mm
120120HLP.105.02	105W	11550 lm	>110 lm/W	>80	3000K - 6500K	1200x1200x80mm
150150HLP.130.02	130W	14430 lm	>110 lm/W	>80	3000K - 6500K	1500x1500x80mm

TECHNICAL DRAWING

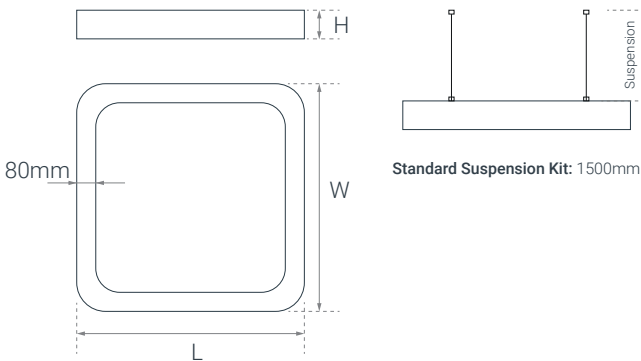

LIGHT BEAM

