

# NEMESIS

LED lighting fitting designed for vandal resist and extreme weather conditions

## Technical description


- White, grey, black electrostatic polyester powder coated heavy gauge steel housing
- IK16 grade opal PC diffuser held against gasket
- Temperproof screws
- Option: Switchable or dimmable
- (1-10V, DALI, Touch-Dim, Casambi)
- 220-240V AC
- -20°C ... +45°C



## TECHNICAL DATA

Code	W	Luminous Flux (lm)	Efficiency (lm/W)	CRI	Color Temperature	Dimensions WxLxH (mm)
600NM.25.02	25W	2750 lm	>110lm/W	>80	3000K - 6500K	102x600x200mm
900NM.37.02	37W	4070 lm	>110 lm/W	>80	3000K - 6500K	102x900x200mm
1200NM.49.02	49W	5390 lm	>110lm/W	>80	3000K - 6500K	102x1200x200mm
1500NM.60.02	60W	6600 lm	>110 lm/W	>80	3000K - 6500K	102x1500x200mm

## TECHNICAL DRAWING

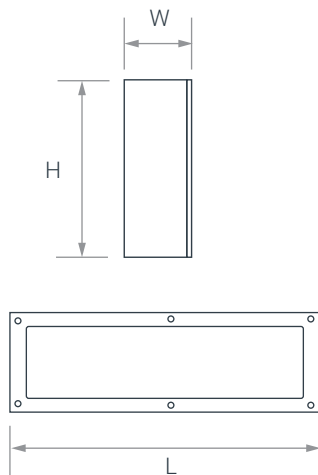

## LIGHT BEAM

