


SQUIRCLE SURFACE

Technical description

- White, grey, black color electrostatic powder coated aluminium extrusion housing
- SMD LED light source
- Lighting grade PC opal diffuser
- Microprismatic diffuser option for extra glare control
- Option: Switchable or dimmable
- Option: 1-10V, DALI, Touch-Dim, Casambi
- Option: 3 Hours emergency kit
- L80B10 - 60.000 hours
- SDCM ≤ 3 (3-step Mac Adam)
- 220-240V AC
- $-20^{\circ}\text{C} \dots +35^{\circ}\text{C}$

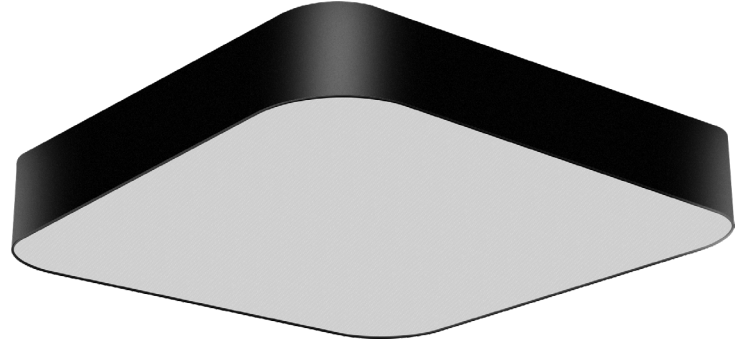

TECHNICAL DATA

Code	W	Luminous Flux (lm)	Efficiency (lm/W)	CRI	Color Temperature	Dimensions LxWxH(mm)
3030SQU8.25.02	25W	2750 lm	>110 lm/W	>80	3000K - 6500K	300x300x80
4040SQU8.32.02	32W	3520 lm	>110 lm/W	>80	3000K - 6500K	400x400x80
6060SQU8.38.02	38W	4180 lm	>110 lm/W	>80	3000K - 6500K	600x600x80
9090SQU8.55.02	55W	6050 lm	>110 lm/W	>80	3000K - 6500K	900x900x80

TECHNICAL DRAWING



LIGHT BEAM

