

# WALL-E DOWN-SQ MAXI

## Technical description

- White, grey, black color anti bacterial electrostatic powder coated aluminium housing
- SMD LED light source
- Tempered glass diffuser
- IP65 protection class
- INOX mounting screws
- Option: Integrated 3-Hours Emergency kit
- Option: Switchable or dimmable (1-10V, DALI, Touch-Dim, Casambi)
- L80B50 100.000 hours LED service life
- 220-240V AC
- -20°C ... +50°C




AVAILABLE  
WITH  
3-HOURS  
EMERGENCY  
KIT



## TECHNICAL DATA

Code	W	Luminous Flux (lm)	Efficiency (lm/W)	CRI	Color Temperature	Dimensions WxLxH (mm)
150WEDSQMX.20.03	20W	2100lm	>105 lm/W	>80	4000K	150x150x300mm

## TECHNICAL DRAWING

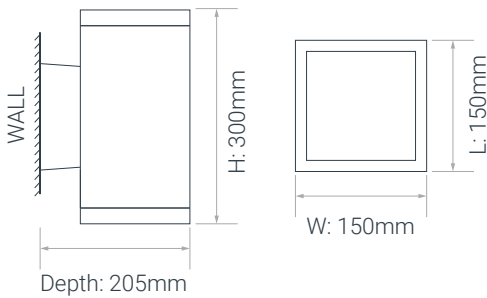

## LIGHT BEAM

### Wide Beam

