


## WALL-E DOWN-SQ UP&DOWN MIDI

### Technical description

- White, grey, black color anti bacterial electrostatic powder coated aluminium housing
- SMD LED light source
- Tempered glass diffuser
- IP65 protection class
- INOX mounting screws
- Option: Integrated 3-Hours Emergency kit
- Option: Switchable or dimmable (1-10V, DALI, Touch-Dim, Casambi)
- L80B50 100.000 hours LED service life
- 220-240V AC
- -20°C ... +50°C

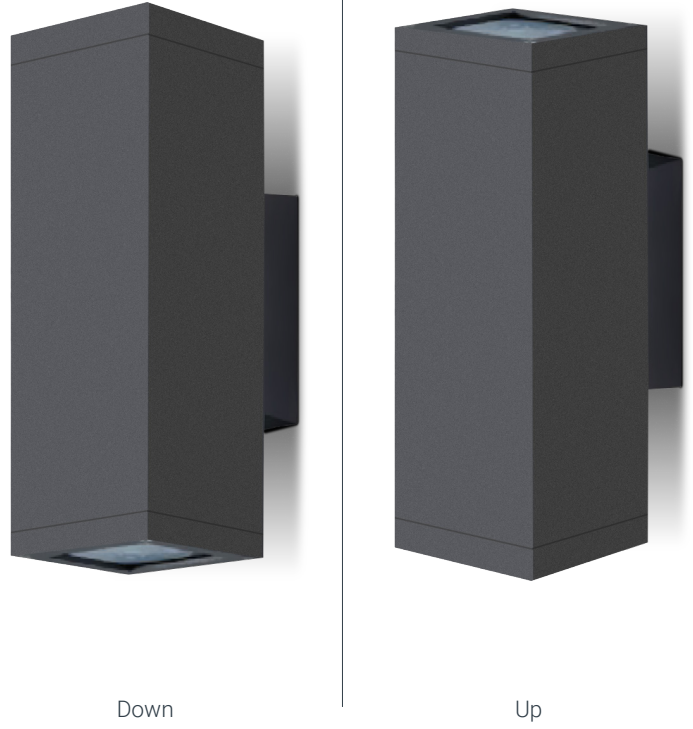


AVAILABLE  
WITH  
3-HOURS  
EMERGENCY  
KIT

### TECHNICAL DATA

Code	W	Total Luminous Flux (lm)	Efficiency (lm/W)	CRI	Color Temperature	Dimensions WxLxH (mm)
100WEUDSQMD.20.03	2x10W	2100lm	>105 lm/W	>80	4000K	100x100x300mm

### TECHNICAL DRAWING

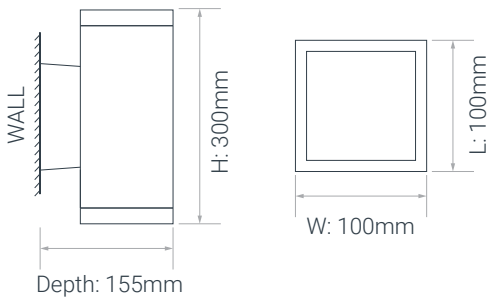

### LIGHT BEAM

#### Wide Beam

