


WAVE SUSPENDED

Technical description

- White, grey, black color electrostatic powder coated aluminium extrusion housing
- SMD LED light source
- Lighting grade PC opal diffuser
- Microprismatic diffuser option for extra glare control
- Option: Switchable or dimmable
- Option: 1-10V, DALI, Touch-Dim, Casambi
- Option: 3 Hours emergency kit
- L80B10 - 60.000 hours
- SDCM ≤ 3 (3-step Mac Adam)
- 220-240V AC
- $-20^{\circ}\text{C} \dots +35^{\circ}\text{C}$

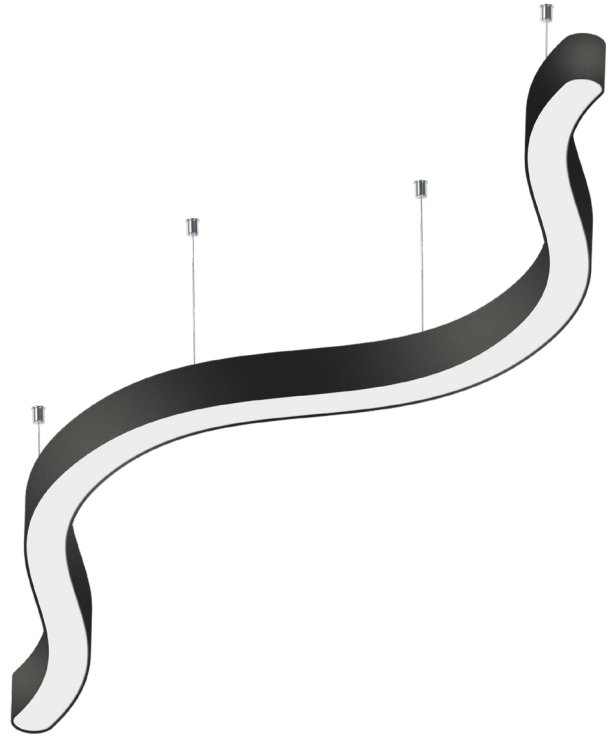


TECHNICAL DATA

Code	W	Luminous Flux (lm)	Efficiency (lm/W)	CRI	Color Temperature	Dimensions WxLxH (mm)
80WVSP.33.02	33W / mt.	3630 lm / mt.	>110 lm/W	>80	3000K - 6500K	80xLengthx80mm

*Can be produced according to requested wave shape (R).

TECHNICAL DRAWING

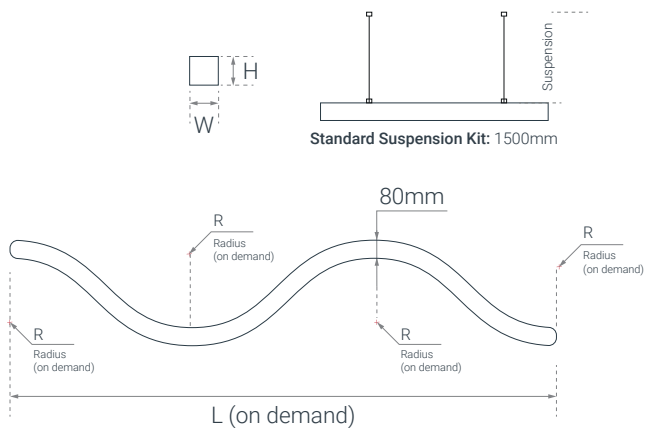

LIGHT BEAM

